

# SMART SOLUTIONS FOR THE LABELING INDUSTRY

## DOUBLE LABEL DISPENSER



Versatile, simple to use, reliable and tough, our double electronic dispenser is able to dispense labels of varying type and size from two different rolls at the same time and will make it easy for you to apply labels in your manufacturing process.

It is the ideal solution for your label handling operations like the food packaging sector and it was made to withstand industrial conditions.

A low investment to better increase your productive workforce.

The double dispenser is equipped with an external auto-switching 100/240VAC - 2.5A at 24V power supply and an electronic circuit controls the functions with a protection 2A fuse.

### SPECIFICATIONS

Features	DD01
Maximum label width	150mm (5.90")
Maximum roll diameter	300mm (11.81")
Minimum core holder	32mm (1.26")
Maximum peel length	180mm (7.08") *

\* Software for labels up to 600mm (23.62") in length available on request




Possibility to use one or both dispensers

Button to choose which dispenser use



Control panel

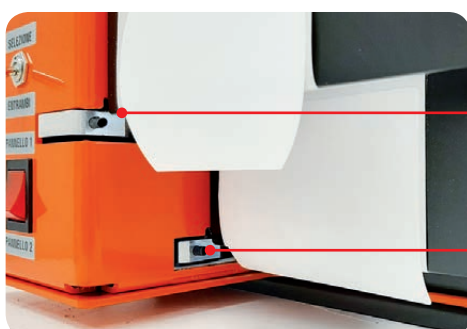

Sensor for label detection

Sensor for label detection

#### Electronic Features

- Photocells for the label's detection
- Tachymeter for the control of the label's length to detach

#### Software Control Characteristics

- Personalization of the company's name
- Control of the photocells' functionality
- Setting to control the number of labels to detach
- Constant visualization of the detached labels' number
- Acoustic signal when the number of detached labels reaches the preset quantity
- Setting to control the peel length of the label
- Constant visualization of the detached labels' series' number
- Acoustic signal when the detached labels' series' number reaches the preset quantity
- Setting of the label's length to detach
- 3 types of advancing:
  - Automatic
  - Timed
  - Manual by pushing ESC or the optional pedal

